

6 in 1

Continuity
 Insulation
 Loop
 RCD

Contact Voltage
 Mains Voltage

Multifunction Tester

with Memory and Download Results to PC!



- Continuity
20/200Ω
200mA Test Current
- Insulation
500/1000V, 20/200MΩ
1mA Rated Test Current
- Loop Impedance
20/2000Ω
15mA Test Current at 2000Ω (No RCD Trip)
- RCD
10/30/100/300/500mA
×1/2, ×1, Fast Trip (40ms), DC, Auto Ramp
- Uc (Contact Voltage) 100V
- Designed to IEC 61010-1, IEC 61557
- Data Memory : 300 measured results
- Download Results to PC by Using 8212 Data Communication Adapter through Optical RS-232C Port.




KEY MULTIFUNCTION TESTER
KEW 6010B

Specifications

Continuity Testing		
Measuring Range		20/200Ω (Auto-Ranging)
Open Circuit Voltage		>6V
Short Circuit Current		>200mA
Accuracy		±(3%rdg+3dgt)
Insulation Resistance Testing		
Measuring Range		20/200MΩ(Auto-Ranging)
Test Voltage		500/1000V
Open Circuit Voltage		+20%-0%
Rated Current		>1mA
Accuracy		±(3%rdg+3dgt)
LOOP Impedance Testing		
Impedance Range		20Ω/2000Ω
Rated Voltage		230V +10%-15% [50Hz]
Normal Test Current		20Ω: 25A/10ms 2000Ω: 15mA/350ms max.
Accuracy		±(3%rdg+8dgt)
RCD Testing		
Test Current (Test Current Duration)	×1/2, ×1	10, 30, 100, 300, 500mA (2000ms)
	FAST	150mA(50ms)
	DC	10,30,100,300mA (2000ms), 500mA(200ms)
	Auto Ramp	Goes up by 10% from 20% to 110% of IΔn. 300ms x 10
Rated Voltage		230V+10%-15% 50Hz
Accuracy	Test Current	×1/2 : -8%-2%
		×1, FAST : +2%+8%
		DC : ±10%
	Trip Time	Auto Ramp: ±4%
		±(1%rdg+3dgt)
Uc Testing		
Measuring Range		100V
Rated Voltage		230V +10%-15% [50Hz]
Test Current		5mA at IΔn=10mA
		15mA at IΔn=30/100mA
		150mA at IΔn=300/500mA
Accuracy		+5%+15%rdg ±8dgt
General		
Safety Standard		IEC61010-1 CAT.Ⅲ 300V Pollution degree 2 IEC61557-1, 2, 3, 4, 6, 10, IEC60529 (IP40)
Power Source		R6 or LR6 x8
Dimensions		175(L) x 115(W) x 86(D) mm
Weight		840g approx.
Accessories		7025 (Test Lead), KAMP10 (Test Lead with IEC Connector) Pouch for Test leads, Shoulder Strap, Shoulder Pad, Instruction Manual
Optionals		7133 (Distribution board test leads) 8212 (Data Communication Adaptor), KEW Report (Software)

Instrument Layout

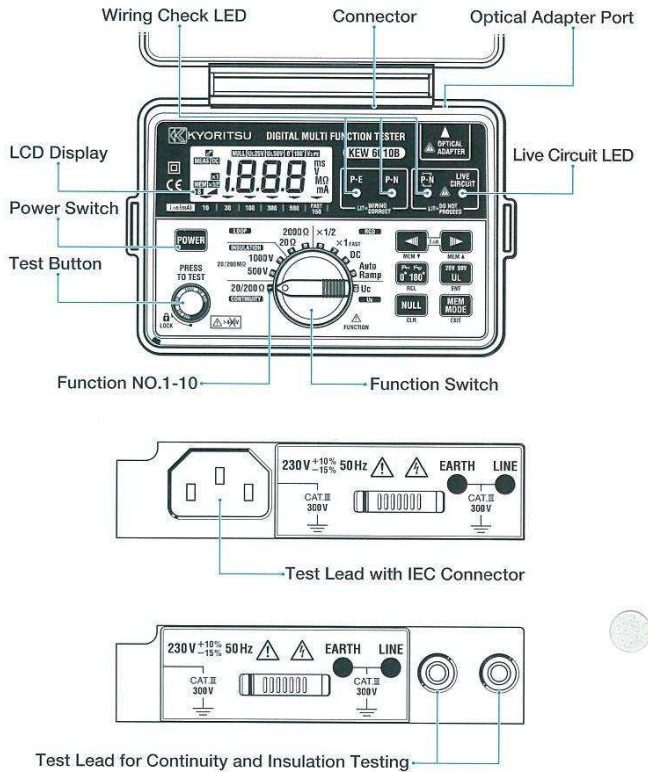

Accessories

MODEL 7025



KAMP 10



AU : Australian plug




UK :British plug (13A)



EU : European SHUKO plug




SA :South African plug



Optional Accessories

MODEL 7133



MODEL 8212 Data Communication Adaptor with "KEW Report"



"KEW Report" Software for report

"KEW Report" transfers measurement data from the KEW 6010B to a PC. Print or import the data into your report. KEW 6010B is connected to a PC via an optically-isolated RS232C interface cable (Model 8212 Data Communication Adaptor)



Safety Warnings :

Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely for correct use. Failure to follow the safety rules can cause fire, trouble, electrical shock, etc. Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.

■ For inquires or orders :



KYORITSU ELECTRICAL INSTRUMENTS WORKS, LTD.

No.5-20,Nakane 2-chome, Meguro-ku,
Tokyo, 152-0031 Japan
Phone:81-3-3723-0131
Fax:81-3-3723-0152
URL:http://www.kew-ltd.co.jp
E-mail:info@kew-ltd.co.jp
Factories:Uwajima & Ehime



In consideration of the environment, soy ink and recycled paper were used in this publication.

●The contents of this leaflet are subject to change without notice. 05.05AD